




DeckTok



LumiBlocks

Model

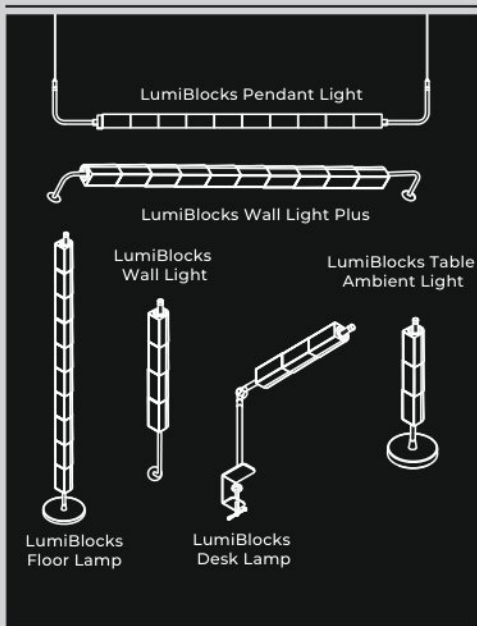

Applications



Media
Room



Bed
Room



Living
Room



Home
Office



Party

Key Features




①Adjust Light Direction



②Lighting Brightness Control



③Color Temperature Control



④RGB Ambient Lighting



⑤Music SYNC



⑥Voice Control

Product Accessories Overview

Category	Component Name	Quantity
LumiBlocks Pendant Light	Rod with Cord (includes 1x Long Rod)	2
	Long Rod (360mm)	2
	M10 Screw	3
	Wall Anchor Kit (with M4 Screws)	7
	Base with Controller, Plate Cover, Adapter	1
	Lamp	10
LumiBlocks Desktop Ambient Light	Table Light Base	1
	Short Rod (200mm)	1
	Long Rod (360mm)	1
	M10 Screw	2
	Cap	1
	Base with Controller, Plate Cover, Adapter	1
	Lamp	3
LumiBlocks Desk Lamp	Desk Clamp Fixture	1
	Pivot Joint with Rod	1
	Short Rod (200mm)	1
	Long Rod (360mm)	1
	M10 Screw	2
	Cap	1
	Base with Controller, Plate Cover, Adapter	1
	Lamp	3

Product Accessories Overview

Category	Component Name	Quantity
LumiBlocks Floor Lamp	Floor Lamp Base	1
	Long Rod (360mm)	4
	M10 Screw	4
	Cap	1
	Base with Controller, Plate Cover, Adapter	1
	Lamp	10
LumiBlocks Wall Light	Rod with Base (includes 1x Long Rod)	1
	Short Rod (200mm)	1
	M10 Screw	1
	Cap	1
	Wall Anchor Kit (with M4 Screws)	3
	Base with Controller, Plate Cover, Adapter	1
	Lamp	4
LumiBlocks Wall Light Plus	Rod with Base (includes 1x Long Rod)	2
	Long Rod (360mm)	2
	M10 Screw	3
	Wall Anchor Kit (with M4 Screws)	5
	Base with Controller, Plate Cover, Adapter	1
	Lamp	10

Product Accessories Overview



Long Rod (360mm)



Short Rod (200mm)



Lamp



Rod with Cord



Rod with Base



Desk Clamp
Fixture



Pivot Joint
with Rod



Table Light Base



Floor Lamp Base



M10 Screw



Wall Anchor Kit
(with M4 Screws)



Base with Controller



Cap



Plate Cover



Adapter



Manual

Specifications

Parameter	Specification
Input Voltage	AC 100 – 240V, 50/60 Hz
Output Voltage	DC 24V
Power(per module)	2.6W
Color Temperature	RGB & 2700-6500K
Wireless Protocols	Bluetooth 5.0/2.4GHz Wi-Fi
Control Methods	App,Voice Control

Fixture Type	Rated Power (Approx.)
LumiBlocks Desk Lamp / LumiBlocks Table Ambient Light	8.5W
LumiBlocks Wall Light	11.5W
LumiBlocks Wall Light Plus / LumiBlocks Floor Lamp / LumiBlocks Pendant Light	26.5W

Assembly & Installation


1. Assemble the lamp rod by connecting it with the provided components to form a complete rod. Do not install the cap yet. For the Wall Light Plus and Pendant Light, attach only one rod with base(or cord) at this stage.




LumiBlocks Floor Lamp/
LumiBlocks Table Ambient Light



LumiBlocks
Desk Lamp



LumiBlocks Wall Light Plus

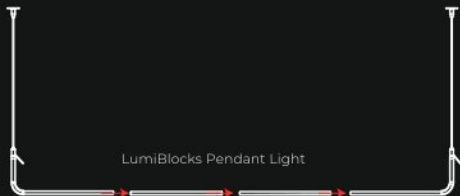

LumiBlocks Pendant Light

Assembly & Installation

2.Thread the base with controller through the lamp rod, ensuring the side with the metal ring faces toward the lamp fixture.



3.Slide the lamp fixture onto the lamp rod and ensure all components are securely connected, with the side featuring the copper-colored metal contacts oriented toward the base.



4.Attach the plate cover.



5.Install the cap or the rod with base(or cord).



6.Place or install the fixture in your desired location.

* For wall-mounted fixtures:

- Drill a hole 5.5 mm in diameter and 30 mm deep into the wall.
- Tap the included wall anchor into the hole.
- Secure the fixture to the wall using the provided M4 screws.



Assembly & Installation

7. Connect the base with controller to the adapter.




8. Plug the adapter into a power outlet.



Button Control

- Single press when the light is off to turn it on.
- Continue single pressing to cycle through different lighting modes.
- Double press to power off the fixture.
- Press and hold the button for 5 seconds until the light flashes red, indicating that the fixture has been reset and entered pairing mode.

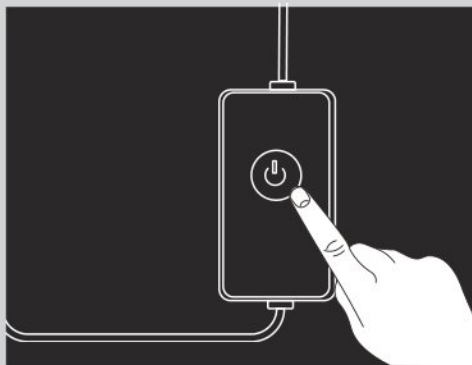

Register in the App

1. Download and install the DeckTok app, then sign in or create an account.




DeckTok APP

How to use DeckTok


1. Open the app, Tap "Sign Up" and go to the Register page.



2. Enter your phone number or email and enter the verification code, then set a password.




3. Log in with the account name and the password you just set.



Add Device

1. Tap the "Add Device" button in the center of the screen, or tap the plus icon (+) in the top-right corner and then select "Add Device" from the menu.

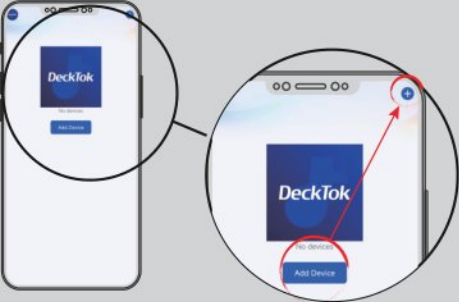

2. Tap the discovered device to enter the network setup page.




3. Select the Wi-Fi network you want to connect to, enter the password, and allow the device to join the control system.



Add Device


4. You can now see your device icon on the home screen. Tap the switch button to turn the light on or off, and tap the product icon to enter the detailed control interface.

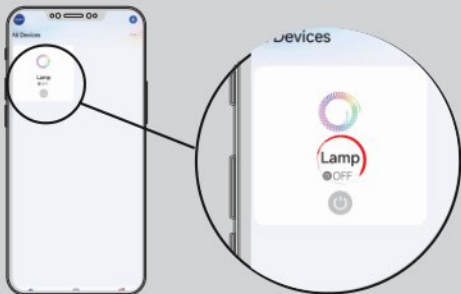

Group Control Setup


1. Tap the pen icon in the upper-right corner.

2. Tap "Create Group."

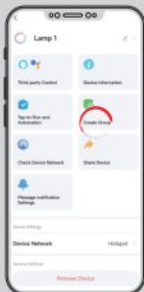



Group Control Setup

3. Tap the green "+" icon to add devices you want to include in the group (it is not recommended to add devices of different types, as this may lead to inconsistent control behavior), then tap the "Save" button in the upper-right corner.

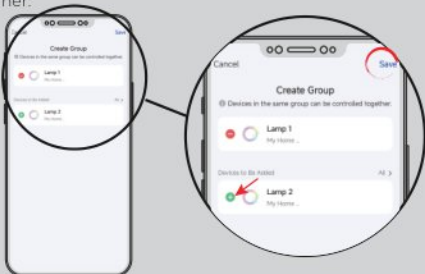


4. Name the group, select the room location for the group, and tap the "Finish" button.

5. The main control screen will display the group you have set up. Tap the switch button to turn the group on or off, and tap the group icon to enter the detailed control interface.

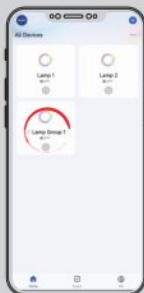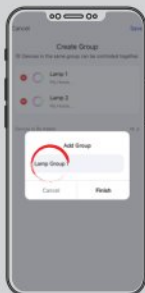

Voice Control Setup


1. On the Me page, tap the Alexa icon.

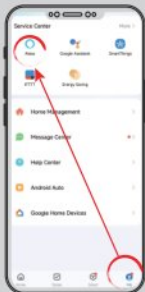

2. Tap "Link to Amazon Alexa" button.



3. The page will redirect to the Amazon website; please log in to your Amazon account following the on-screen instructions.

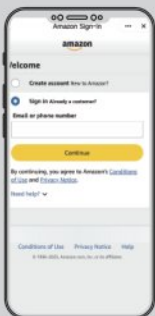

4. Tap "Allow"



Voice Control Setup

4.Alexa connection is complete. You can now control your devices using Alexa voice commands.



If you wish to connect to other voice control platforms such as Google Assistant, you can complete the integration by following similar setup steps.

Troubleshooting

Issue	Possible Cause	Solution
Lamp head not lighting	Not fully connected	Re-seat the lamp
		Press and hold the controller button for 5 seconds
Flickering or dim output	Overloaded system	Reduce number of active lamp heads
	Loose connection	Ensure all lamp components are properly and securely connected
App can't find device	Bluetooth off	Enable Bluetooth
	Out of range	Stay within 10m

Notice

Important Safety Information

To ensure safe operation, please read and follow these warnings:

1. NEVER connect the LED strip directly to mains voltage (AC 100-220V). Always use the provided DC 24V power adapter.
2. This product is rated IP20 and must NOT be installed in bathrooms, kitchens near sinks, or any damp/dusty environments.
3. If the light emits smoke, unusual odor, or becomes excessively hot, disconnect power immediately and discontinue use.
4. Keep power adapters and controllers out of reach of children and pets.
5. If the product exhibits abnormal conditions such as excessive heating or unusual odors, immediately discontinue use and disconnect the power supply.
Please contact us promptly through any of the support channels we provide.

- * The maximum number of light modules that can be connected is 5 for the Wall Light, Desktop Ambient Light, and Task Lamp, and 10 for the Wall Light Plus, Pendant Light, and Floor Lamp. When using standalone lamp rods, do not exceed these limits, as doing so may cause overheating or damage to the fixture.

Before Installation

1. Ensure that all accessories have been removed from the packaging.
2. Make sure Bluetooth is enabled on your phone and that it is connected to a 2.4 GHz Wi-Fi network (the light fixture does not support 5 GHz networks).
3. Place the base on a flat, stable surface (e.g., desk, shelf, floor).
4. Ensure the area is dry and well-ventilated.
5. Unplug the power cord before connecting any modules.
6. Ensure the DeckTok app has been downloaded and installed on your phone.

Warranty & Support

Warranty Information

Coverage:

- 12-month limited warranty is provided for the base, arms, and lamp heads.
- This warranty covers defects in materials and workmanship.

Exclusions:

- This warranty does not cover damage resulting from:
Misuse or improper handling.
- Exposure to liquids.
- Unauthorized modifications or repairs.
- Operation exceeding the specified power limits.

If you have any questions or need assistance, feel free to reach out to us directly at the contact details listed below.

Company Name: Decktok Co., Ltd.

Website: www.decktok.com

Contact number: +1 628 304 2015

Email: info@decktok.com

WhatsApp: +852 6741 3519

