


***DeckTok***

**Outdoor Ground Lights**

User Manual

# Installation Mode

---

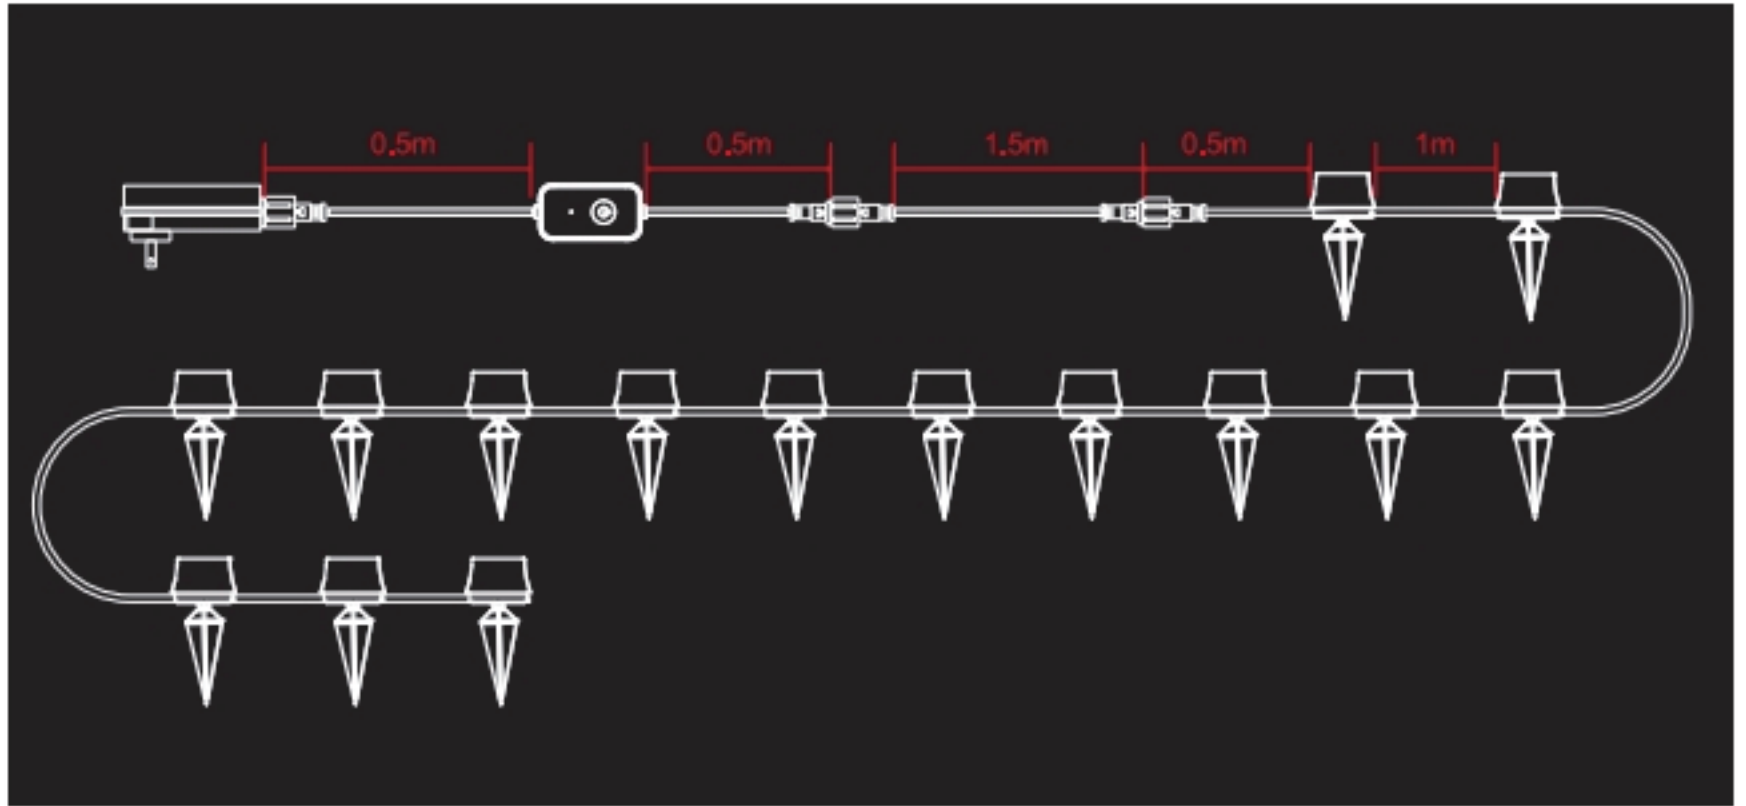

\*This picture shows the standard installation spacing for the ground plug. However, this installation spacing is also applicable to the two installation methods of Tape application and cable tie bundling.

# Applications

---

Courtyards	Festival and Event Decor	Outdoor Dining Area	Garden	Hotel

# Specifications


---

Product Model:	DEK-P0115B
Rated Power:	24W
Input Voltage:	AC100-120V
Output DC voltage:	24V $\overline{=}$
CRI:	$\geq 80$
Lamp Base:	15 Light Heads
Color Temperature:	RGB&2700-6500K
Luminous Flux:	100LM(Each light)/1500LM(Total light)

**\*The adapter cannot support more than 15 lamp heads at its current 24W capacity.**

## Accessories

---

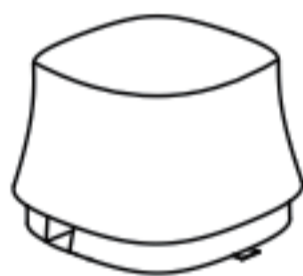


Lights \* 15



Stakes \* 15



Adapter \* 1

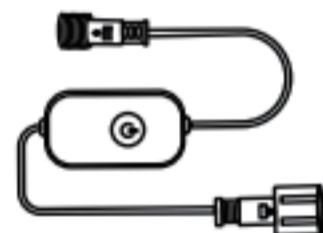

Controller \* 1



Extension Cord \* 1



Tapes\* 15



Cable Clips \* 30



Ribbons \* 30



Anchors \* 30



Screws \* 30




Manual \* 1

# Installation Method


---

## 1. Inground Installation


1). Connect the adapter output terminal to the controller input terminal.

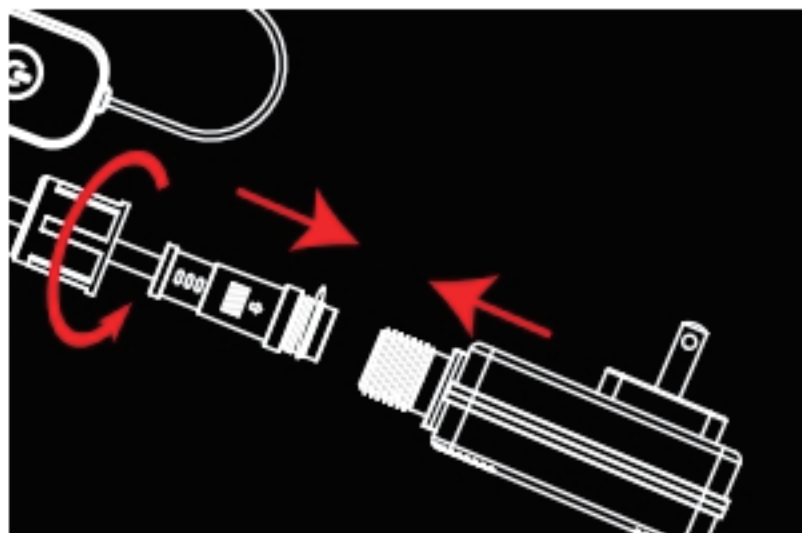


2). Connect the controller output terminal to the Extension Cord.

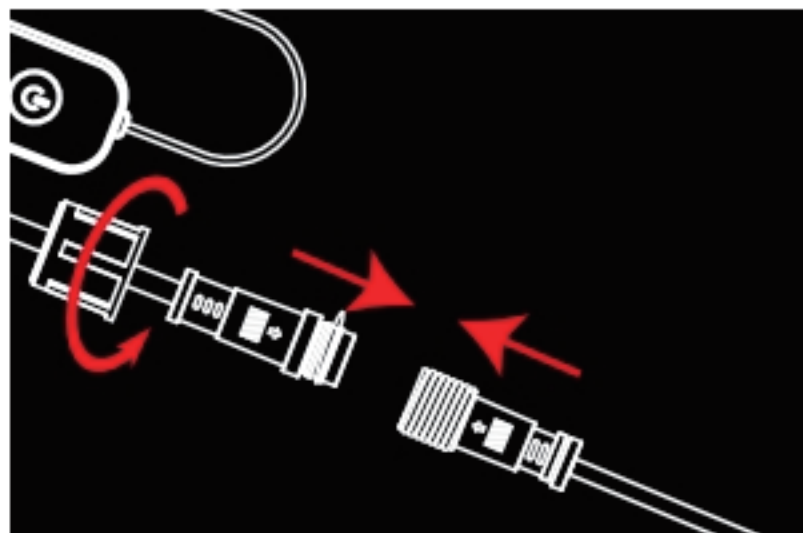

3). Connect the Extension Cord to the light fixture power input terminal.

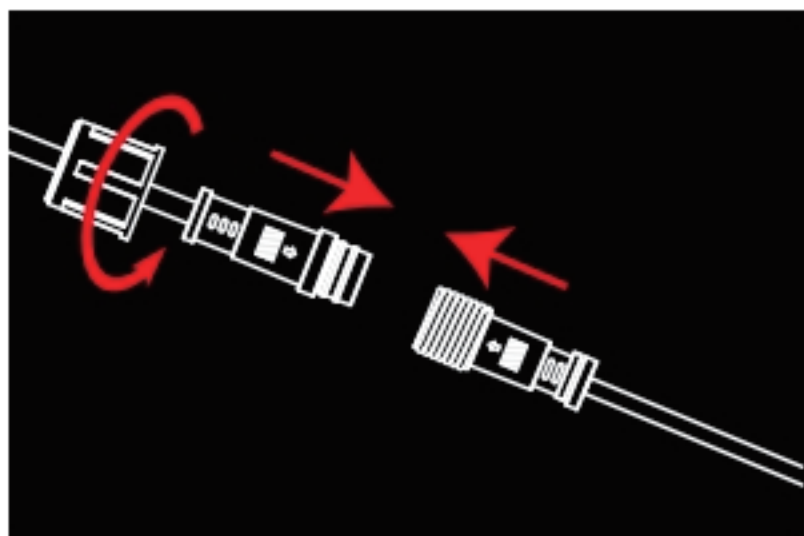


4). Snap the ground stake into the lamp head base to secure it.

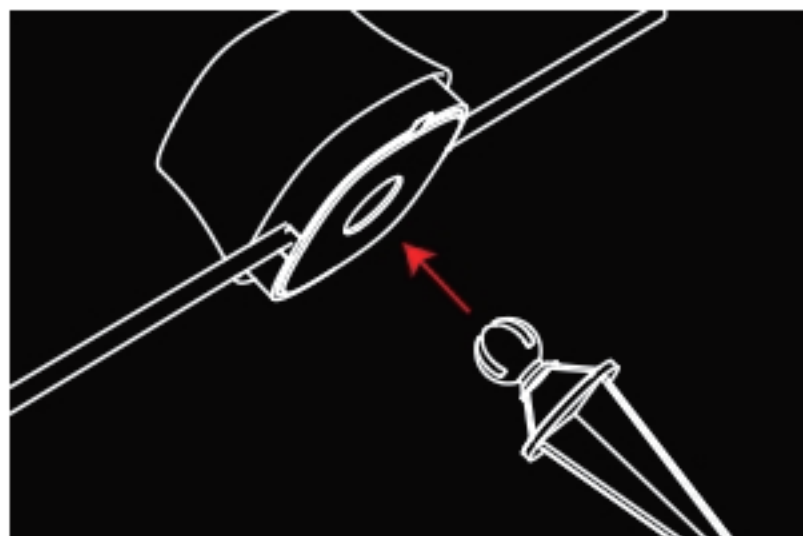

5). Firmly insert the light fixture into the soft ground.



6). Plug the adapter into a power outlet.

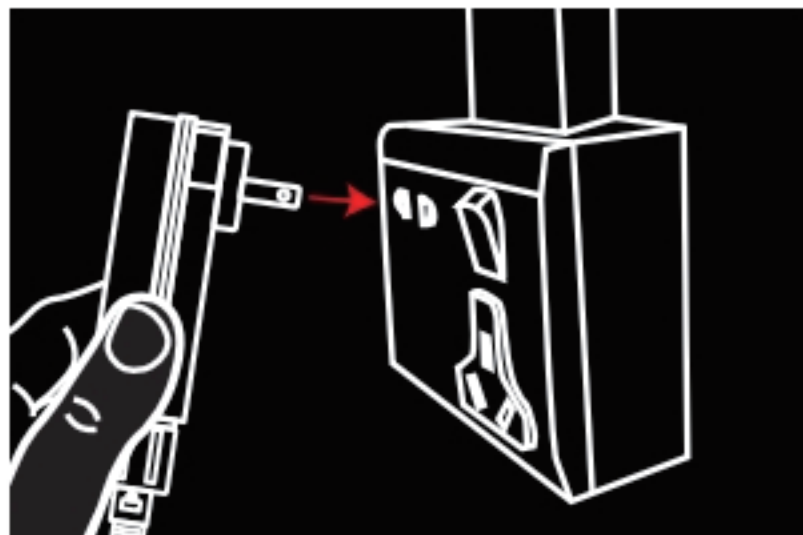


# Installation Method


---

## 2. Adhesive Tape Installation

1). Peel off one side of the Tape.

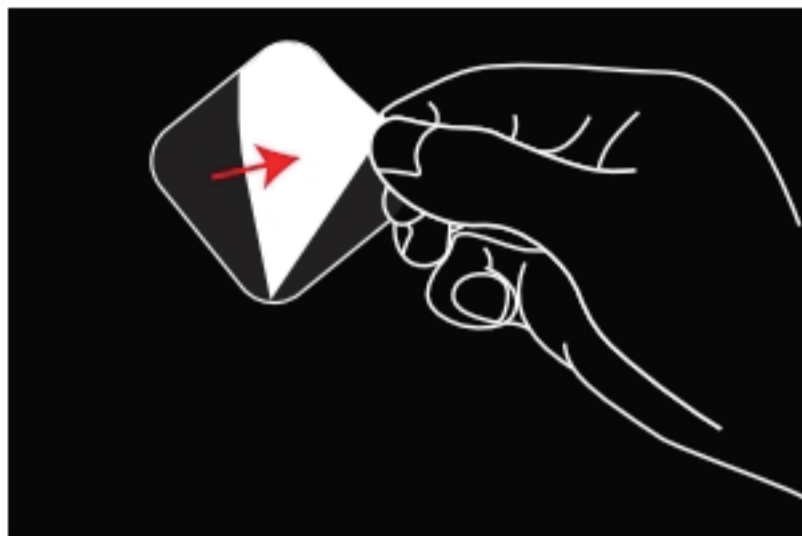


2). Attach the exposed adhesive side to the bottom of the light body.

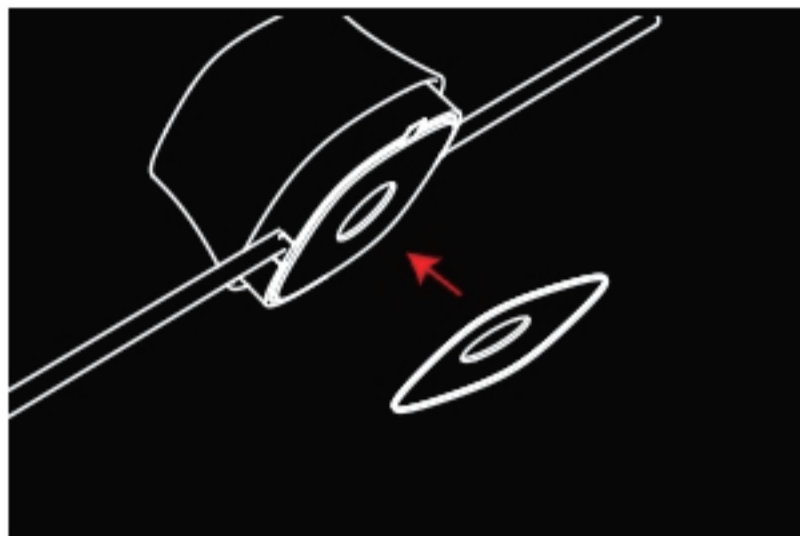

3). Peel off the other side of the Tape.




4). Press the product onto surfaces such as railings or tiles.

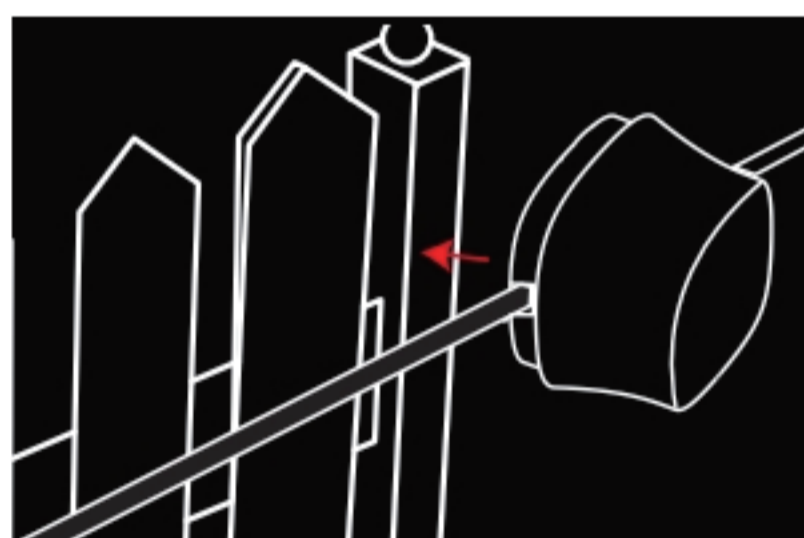


## 3. Threaded Fastening Method

1). Pre-drill holes in the wall.

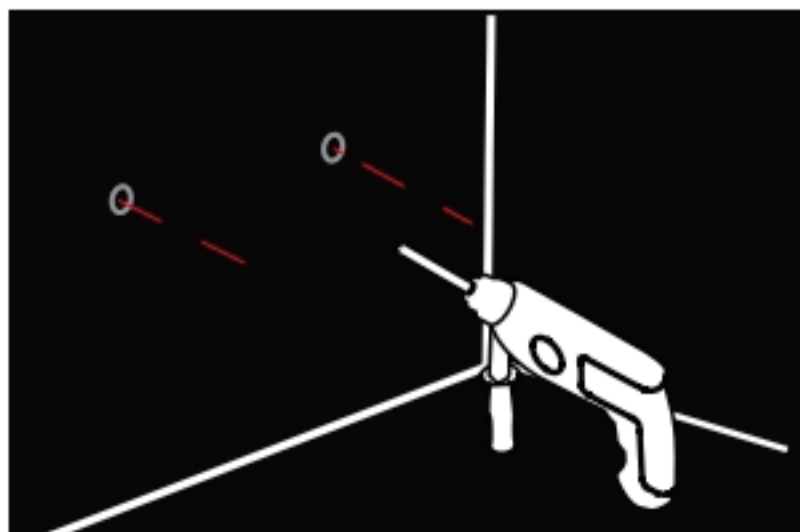


2). Tap the included wall anchor into the hole.

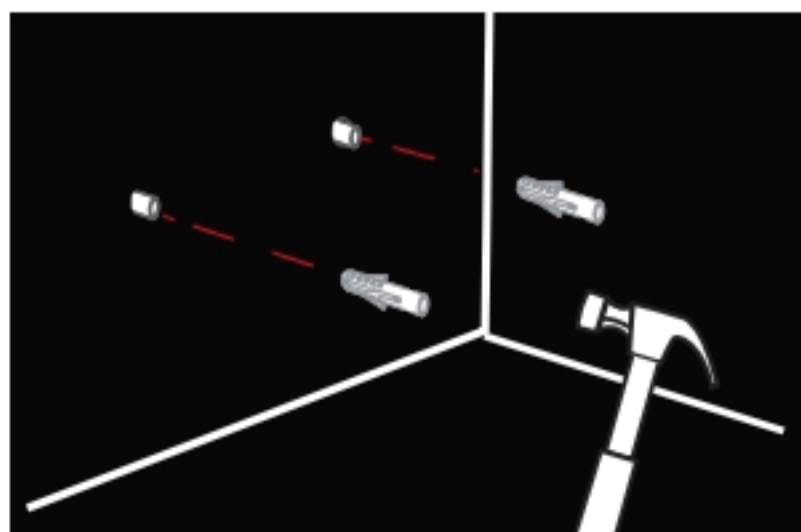


# Installation Method

---

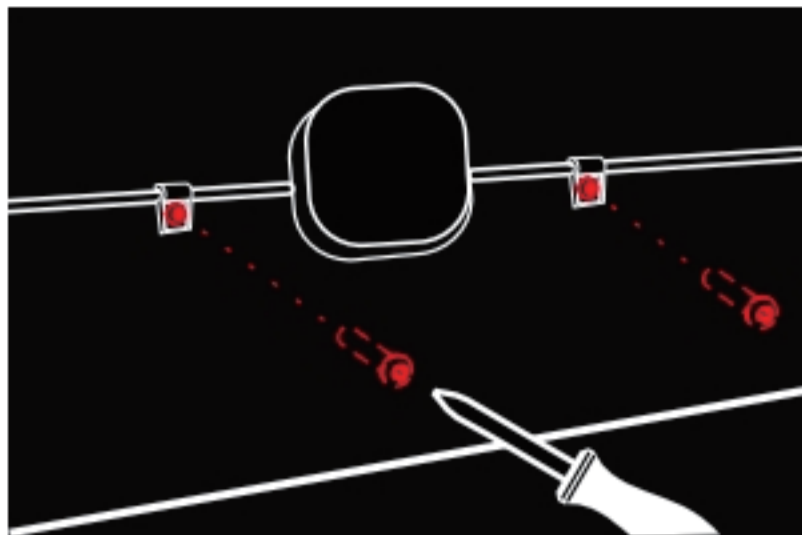

3). Attach the wire clip to the light fixture wires first, align the clip with the pre-drilled holes, and then tighten the screws.

## 4. Cable Tie Installation Method

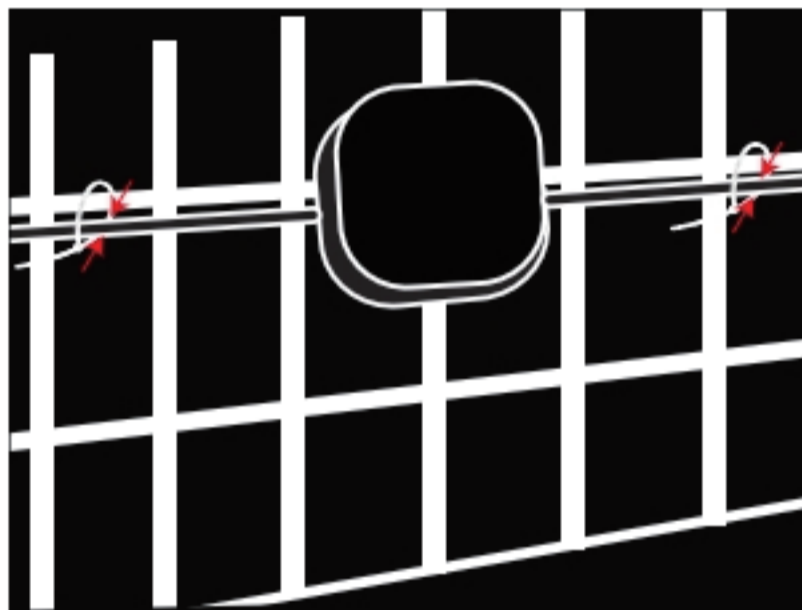

1). Tie the cables to the railing with cable ties.

# Warranty Information

---

Decktok provides a one-year limited warranty for this product starting from the date of purchase.

## Warranty Coverage:

Defects in materials or workmanship under normal use.

## Warranty Exclusions:

1. Damage caused by misuse, improper handling, accidental drops, water ingress, fire, or natural disasters.
2. Unauthorized repairs, modifications, or disassembly.
3. Normal wear and tear, as well as natural battery capacity degradation (within reasonable limits).
4. Damage caused by using non-original or incompatible accessories.

For warranty service, please provide the product, proof of purchase (invoice or receipt), and this manual to your retailer or contact Decktok Customer Service directly.

Warranty policies may vary by region. Please visit <https://decktok.com/> for detailed information.

# FCC Compliance Statement

---

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and this device must accept any interference received, including interference that may cause undesired operation.

The Bluetooth module in this product has been tested and certified under FCC ID:2ANDL-TI-U-HL.

The device is intended for use with a 24V Adapter only. Unauthorized changes or modifications to this equipment could void the user's authority to operate the device.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

# Customer Service

---

Company Name: Decktok Co., Ltd.

 [www.decktok.com](http://www.decktok.com)

 Contact number: +1 628 304 2015

 [info@DeckTok.com](mailto:info@DeckTok.com)

 WhatsApp: +852 6741 3519